






1. unique design with patent and excellent exquisite appearance
2. Driver build in, support 0-10V dimming
3. Support for suspend / surface ceiling mounting installations
4. Uniform lighting output, lighting effect reach to 85LM/W
5. 35000H lifetime

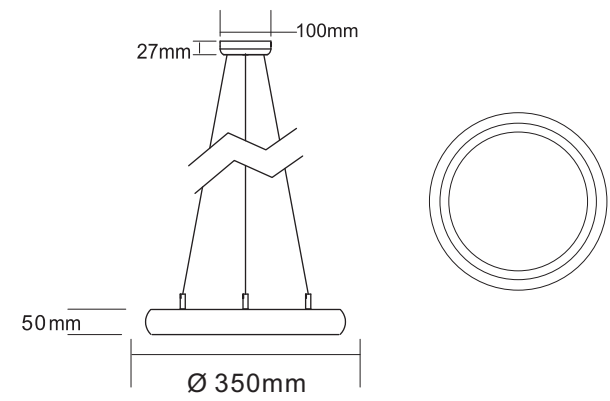

Size	Ø350mmx50mm
Input Voltage	AC100~240V
Input Power	18W
Power Factor	≥0.9
Housing Color	White/Black
Luminous Flux	1500LM/1470LM/1440LM
Color Rendering	>80
Life Time	35,000H
Fixture Materia	6063 Aluminium
CCT	2800k-6350k
LEDs	168pcs
Storage Temperature	-40°C~+80 °C
Working Temperature	-20°C~+45 °C
Inner package size	480mmX480mmX90mm
Outer package size	495mmX495mmX465mm
Installation	Pendant, Ceiling mounting
Net Weight	1.9kg

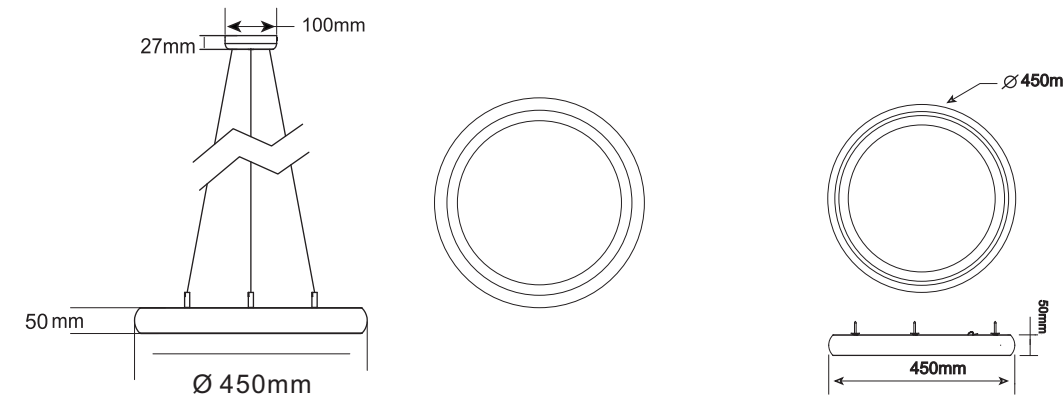


Size	Ø450mmx50mm
Input Voltage	AC100~240V
Input Power	30W
Power Factor	≥0.9
Housing Color	White/Black
Luminous Flux	2550LM/2460LM/2400LM
Color Rendering	>80
Life Time	35,000H
Fixture Materia	6063 Aluminium
CCT	2800k-6350k
LEDs	264pcs
Storage Temperature	-40°C~+80 °C
Working Temperature	-20°C~+45 °C
Inner package size	480mmX480mmX90mm
Outer package size	495mmX495mmX465mm
Installation	Pendant, Ceiling mounting
Net Weight	3kg

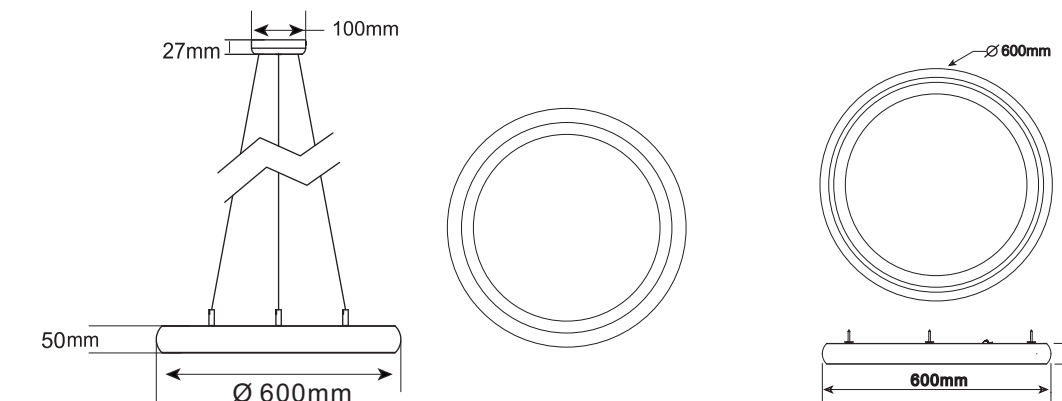

Size	Ø600mmx50mm
Input Voltage	AC100~240V
Input Power	50W
Power Factor	≥0.9
Housing Color	White/Black
Luminous Flux	4250LM/4100LM/4000LM
Color Rendering	>80
Life Time	35,000H
Fixture Materia	6063 Aluminium
CCT	2800k-6350k
LEDs	468pcs
Storage Temperature	-40°C~+80 °C
Working Temperature	-20°C~+45 °C
Inner package size	480mmX480mmX90mm
Outer package size	495mmX495mmX465mm
Installation	Pendant, Ceiling mounting
Net Weight	5kg

## Package

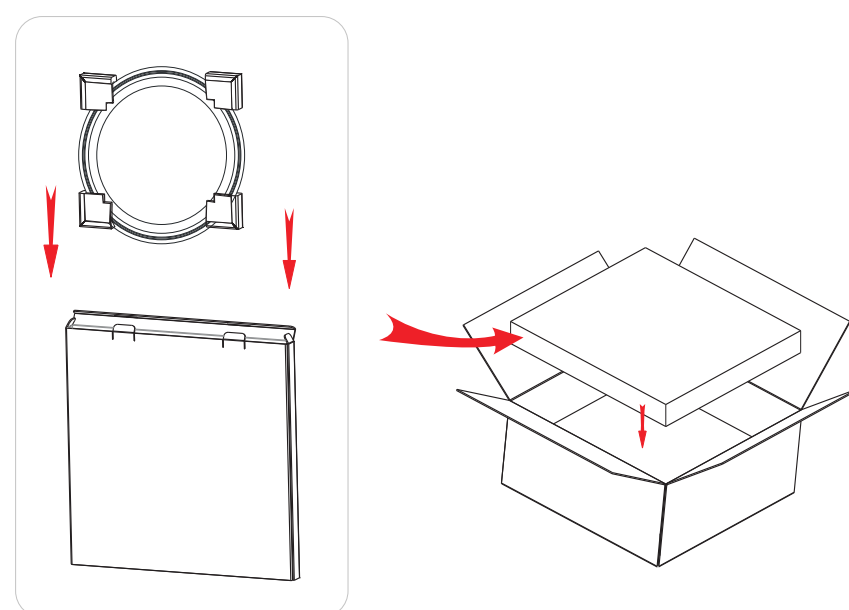

SIZE	350mm	450mm	600mm
N.W.	2.5kg	4kg	6.2kg
G.W.	12.5kg	20kg	31kg
QTY	5pcs	5pcs	5pcs