




Vandal Resistant LED Light



Pedestrian Underpass, Heavy Industry, School, Prison, Athletic Facilities and similar places with a rough environment.

CLR-2

LED Light for Rough Environment




Catena a.s
Jernkroken 18
N-0976 OSLO
Norway

Tel: +47 22 80 42 60
E-mail: post@catena.no
Web: www.catena.no

CLR-2 LED Light for Rough Environment

Technical information

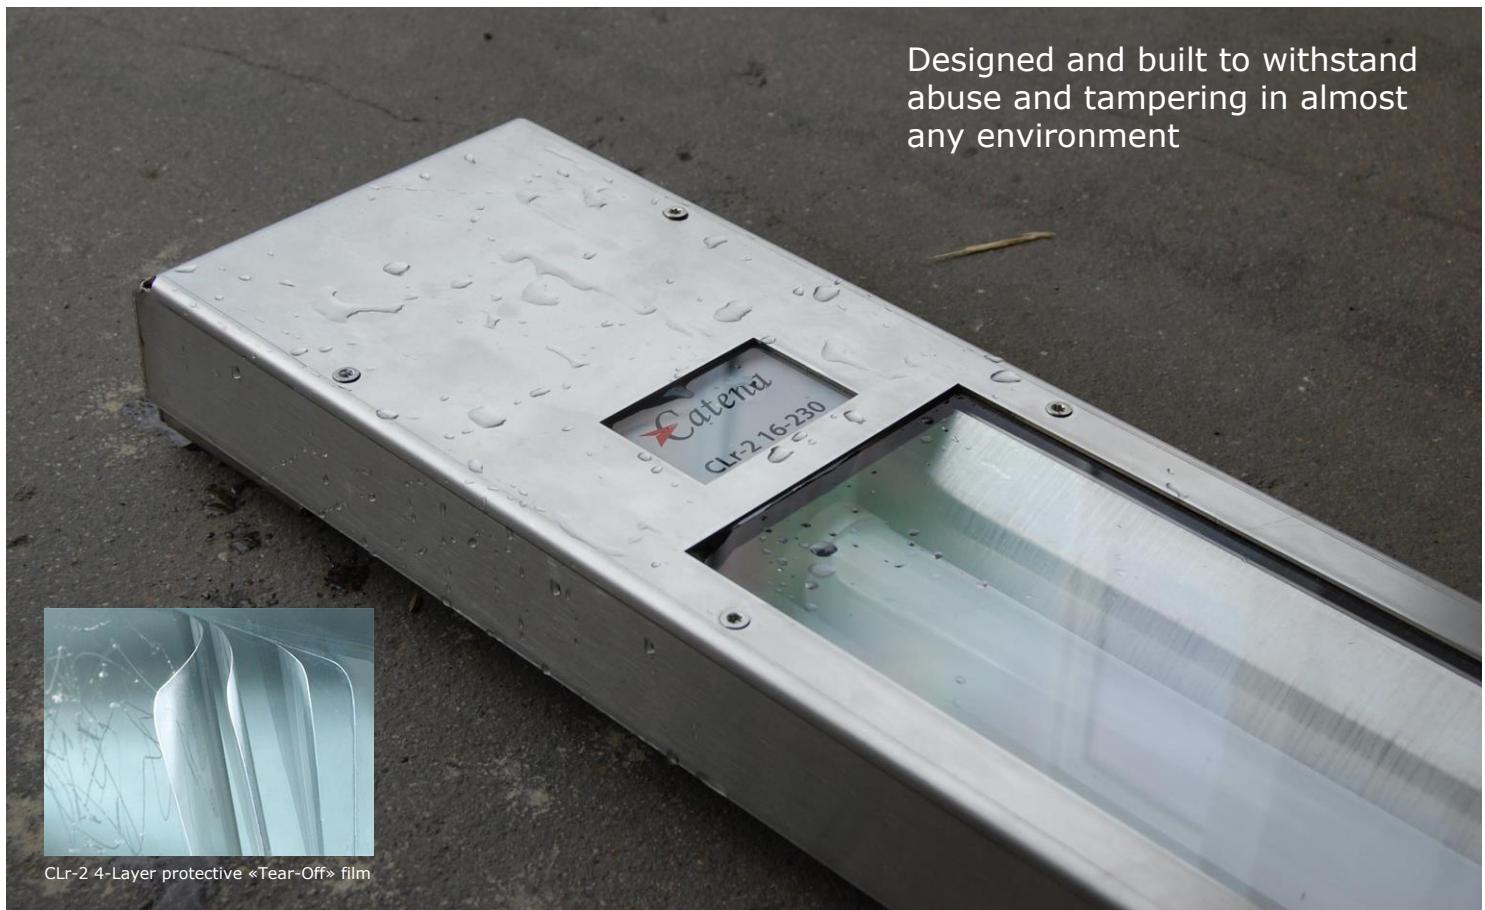

Designed and built to withstand abuse and tampering in almost any environment

CLR-2 4-Layer protective «Tear-Off» film

Technical information:

Box and cover:	Acid-resistant stainless steel 316L/EN 1.4404 1.5mm.
Window:	Polycarbonate 10mm.
Colour:	Unpainted (free of choice RAL Colour as option).
Mounting:	Four holes for M8 in both ends, hidden behind cover. 10xTorx for cover. Can be mounted on wall, ceiling or corner.
Cable entry:	3xM25 cable glands hidden behind cover.
Mains connection:	5-pole screwless terminal block 0.75-2.5mm ² .
LED module:	Philips LED Line 2200Lm 840 with diffuser.
LED driver:	Philips Xitanium 36W. DALI control as option.
Light temperature:	840/4000K.
Mains voltage:	230VAC/24W Class I.
Surge protector:	10KV.
Operating temperature:	-30 til +60°C.
Water and dust resistance:	IP65.
Impact resistance:	IK10.

Part number and description :

Part number	Description	Brightness (Lumen)	Color Rendering Index (CRI)	Weight	Size (lxdxh)
CLR-2 LED Light for Rough Environment					
CLR-2-16-230-3	LED Light 24W Heavy Duty Luminaire	2200Lm	80	10.2Kg	920x70x190mm
CLR-2-16-230-3-DALI	LED Light 24W Heavy Duty Luminaire DALI	2200Lm	80	10.2Kg	920x70x190mm
CLR-2-BV	Angled mounting bracket (30 og 45 degrees) for CLR-2				
CLR-2-BR	Straight mounting bracket for CLR-2				
42306LPM	CLR-2 4-Layer protective «Tear-Off» film				
42306AK	Application Kit for 4-Layer «Tear-Off» film				